

Technical data sheet

Product features



Freezing counter GN-2D

Model	SAP Code	00039825
MFT 2DN	A group of articles - web	Cooling and freezing tables



- Material: Stainless steel
- GN / EN size in device: GN 1/1
- Number of GN / EN: 2
- Number of doors: 2
- Control type: Digital
- Minimum device temperature [°C]: -10
- Maximum device temperature [°C]: -20
- Max ambient temperature [°C]: 38
- Insulation thickness [mm]: 60
- Unit: Right
- Automatic defrost: Yes


SAP Code	00039825	Number of GN / EN	2
Net Width [mm]	1360	GN / EN size in device	GN 1/1
Net Depth [mm]	700	Minimum device temperature [°C]	-10
Net Height [mm]	900	Maximum device temperature [°C]	-20
Net Weight [kg]	97.00	Refrigerant	R290
Power electric [kW]	0.260	Worktop material	SS201
Loading	230 V / 1N - 50 Hz	Refrigerant weight [g]	80.00
Energy class	B	Climate class	4
Chamber volume [l]	314	Height with rim [mm]	940
Number of doors	2		

Technical data sheet



Technical drawing

Freezing counter GN-2D		
Model	SAP Code	00039825
MFT 2DN	A group of articles - web	Cooling and freezing tables

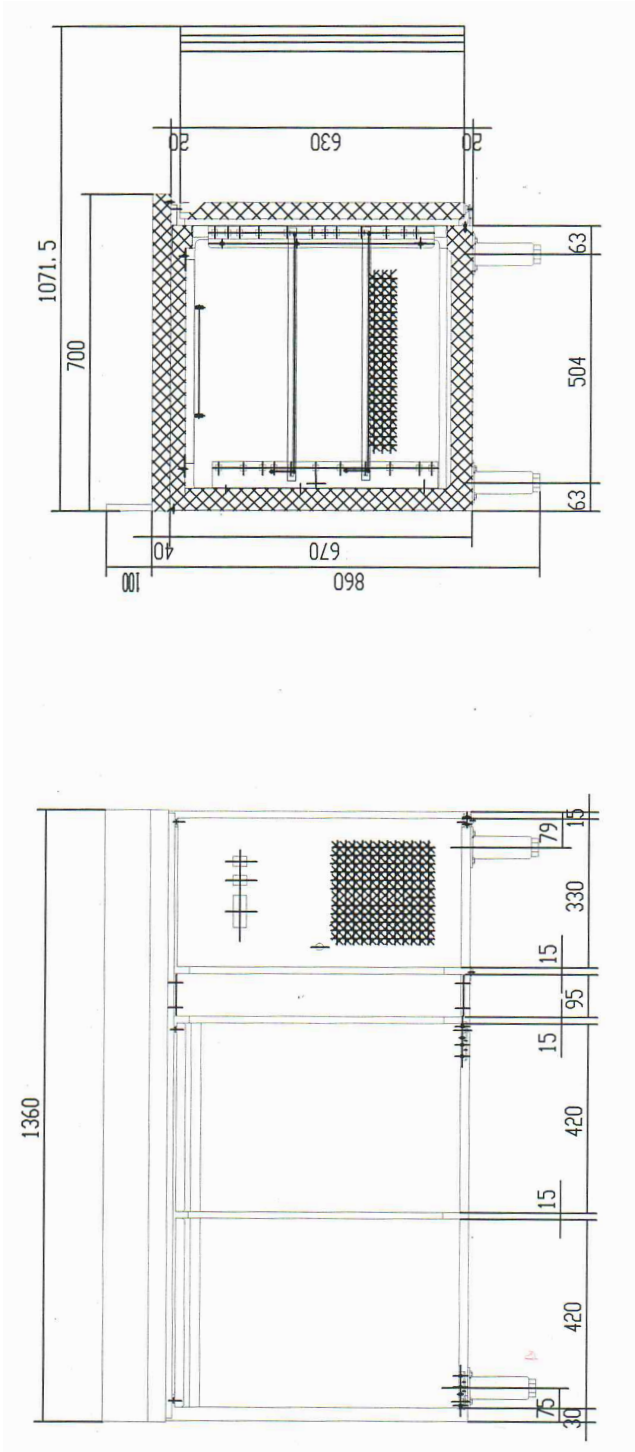

Technical data sheet



Product benefits

Freezing counter GN-2D

Model	SAP Code	00039825
MFT 2DN	A group of articles - web	Cooling and freezing tables

1

Energy class B – annual energy consumption 1168 kWh

Very energy-efficient operation

- Reduced energy costs

2

Temperature range -10 to -20 °C

A true freezing unit, not just refrigeration

- Deep-frozen goods can be stored directly at the workstation, no trips to the central freezer needed

3

Refrigerant R290 (natural, low GWP)

Complies with current EU environmental legislation

- Future-proof operation with no risk from upcoming refrigerant bans; lower carbon footprint for customers with ESG requirements

4

Automatic defrost

Unattended operation

- Staff never defrost manually – saves labour and reduces the risk of breakdowns

5

Insulation 60 mm

Thick PU insulation, lower heat loss

- Lower energy consumption and stable internal temperature even at higher ambient temperatures (up to 38 °C)

6

All-stainless design of parts that are in the contact with foodstuffs

used stainless steel intended for contact with food
good maintenance
zero contamination
resists even weaker acids

- long service life and high durability

7

All-stainless design of parts that are in the contact with foodstuffs

used stainless steel intended for contact with food
good maintenance
zero contamination
resists even weaker acids

- long service life and high durability

Technical data sheet

Technical parameters



Freezing counter GN-2D

Model	SAP Code	00039825
MFT 2DN	A group of articles - web	Cooling and freezing tables

1. SAP Code:

00039825

2. Net Width [mm]:

1360

3. Net Depth [mm]:

700

4. Net Height [mm]:

900

5. Net Weight [kg]:

97.00

6. Gross Width [mm]:

1400

7. Gross depth [mm]:

740

8. Gross Height [mm]:

910

9. Gross Weight [kg]:

112.00

10. Device type:

Electric unit

11. Power electric [kW]:

0.260

12. Loading:

230 V / 1N - 50 Hz

13. Energy class:

B

14. Refrigerant:

R290

15. Cooling type:

Static with fan

16. Material:

Stainless steel

17. Exterior color of the device:

Stainless steel

18. Min ambient temperature [°C]:

0

19. Max ambient temperature [°C]:

38

20. Device properties 2:

Freezing

21. GN / EN size in device:

GN 1/1

22. Number of GN / EN:

2

23. Chamber volume [l]:

314

24. Worktop material:

SS201

25. Adjustable feet:

Yes

26. Insulation thickness [mm]:

60

27. Gasket:

Yes

28. Number of doors:

2

Technical data sheet

Technical parameters



Freezing counter GN-2D

Model	SAP Code	00039825
MFT 2DN	A group of articles - web	Cooling and freezing tables

29. Unit:

Right

30. Control type:

Digital

31. Annual energy consumption [kWh]:

1168

32. Minimum device temperature [°C]:

-10

33. Maximum device temperature [°C]:

-20

34. Automatic defrost:

Yes

35. Refrigerant weight [g]:

80.00

36. Number of grids:

2

37. Gross Volume [m3]:

0.943

38. Net Volume [m3]:

0.857

39. Climate class:

4

40. Height with rim [mm]:

940

41. Cross-section of conductors CU [mm²]:

0,5