

Technical data sheet



Product features

Manual water softener double tap 6 l

| | | |
|--------------|----------------------------------|-----------------|
| Model | SAP Code | 00002199 |
| LT 16 | A group of articles - web | Water softeners |



- Resin capacity: 11.20
- Inlet pressure [bar]: 2-8
- Material: Stainless steel

| | | | |
|-----------------------|----------|------------------------|-------|
| SAP Code | 00002199 | Net Height [mm] | 615 |
| Net Width [mm] | 190 | Net Weight [kg] | 13.00 |
| Net Depth [mm] | 255 | Resin capacity | 11.20 |


Technical data sheet



Technical drawing

Manual water softener double tap 6 l

| | | |
|--------------|----------------------------------|-----------------|
| Model | SAP Code | 00002199 |
| LT 16 | A group of articles - web | Water softeners |

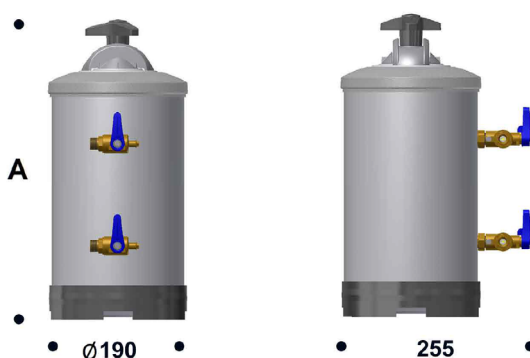

TECHNICAL DATA

| | |
|---|----------------------|
| Height A | mm 600 |
| Weight | Kg 12 |
| Supply water pressure | min 1 bar, max 8 bar |
| Maximum flow rate recommended | 1000 l/h |
| Room temperature | min 4°C - max 25°C |
| Salt content per regeneration | 2 kg |

SUPPLY WATER CHARACTERISTICS

- Drinking water
- Temperature: min 4°C - max 25°C
- Crystal-clear water (SDI 1)
- Maximum hardness 90°F

THE PACKAGING CONTAINS:

- 1 steel AISI 304 cylinder holding 16 litres
- 11.2 litres of cationic resins adapt for softening
- 1 instruction manual
- 1 unloading pipe

| LITRES OF SOFTENED WATER ACCORDING TO ITS HARDNESS | | | | | | |
|--|------|------|------|------|------|--------------------------------------|
| °f | 20 | 30 | 40 | 50 | 60 | CYCLIC CAPACITY [m ³ ·°f] |
| °d | 11 | 16 | 22 | 28 | 33 | |
| ppm CaCO ₃ | 200 | 300 | 400 | 500 | 600 | |
| | 3360 | 2240 | 1680 | 1344 | 1120 | 67.2 |

THE WATER SOFTENER IS SUITED FOR:



Technical data sheet



Product benefits

Manual water softener double tap 6 l

| | | |
|--------------|----------------------------------|-----------------|
| Model | SAP Code | 00002199 |
| LT 16 | A group of articles - web | Water softeners |

1

All-stainless design

only stainless steel intended for food contact is used

- absolutely rust-proof and non-magnetic design
- resists even weak acids easier compliance with hygiene standards (HACCP); easy maintenance and cleaning

2

Regeneration of the softener is done only with salt

light regeneration with salt

- no complex operators are required, regeneration can be handled by trained operators

Technical data sheet



Technical parameters

Manual water softener double tap 6 l

| | | |
|--------------|----------------------------------|-----------------|
| Model | SAP Code | 00002199 |
| LT 16 | A group of articles - web | Water softeners |

1. SAP Code:

00002199

8. Gross Height [mm]:

650

2. Net Width [mm]:

190

9. Gross Weight [kg]:

14.00

3. Net Depth [mm]:

255

10. Device type:

Neutral unit

4. Net Height [mm]:

615

11. Material:

Stainless steel

5. Net Weight [kg]:

13.00

12. Inlet pressure [bar]:

2-8

6. Gross Width [mm]:

200

13. Resin capacity:

11.20

7. Gross depth [mm]:

200

14. Additional information:

The consumption for 1 regeneration cycle is 2kg of salt and 100-110l of water.