

Technical data sheet



Product features

Blast chiller 10x GN 1/1 with wheels and LED lighting

Model	SAP Code	00038864
SHFN 1011 KL LED	A group of articles - web	Šokery a multifunkční zařízení



- Shock cooling cycle kg / min (+3 ° C): 32
- Shock freeze cycle kg / min (-18 ° C): 22
- Minimum device temperature [°C]: -40
- Maximum device temperature [°C]: 3
- Probe: 4-points
- Insulation thickness [mm]: 60
- Control type: Digital

SAP Code	00038864	Number of GN / EN	10
Net Width [mm]	790	GN / EN size in device	GN 1/1, EN 600x400
Net Depth [mm]	807	GN device depth	40
Net Height [mm]	1629	Shock cooling cycle kg / min (+3 ° C)	32
Net Weight [kg]	145.00	Shock freeze cycle kg / min (-18 ° C)	22
Power electric [kW]	1.310	Control type	Digital
Loading	230 V / 1N - 50 Hz		



Technical data sheet



Technical drawing

Blast chiller 10x GN 1/1 with wheels and LED lighting

Model	SAP Code	00038864
SHFN 1011 KL LED	A group of articles - web	Šokery a multifunkční zařízení

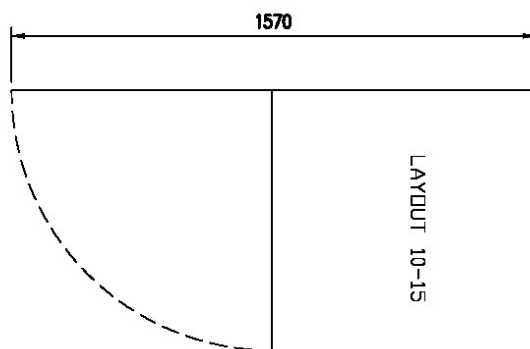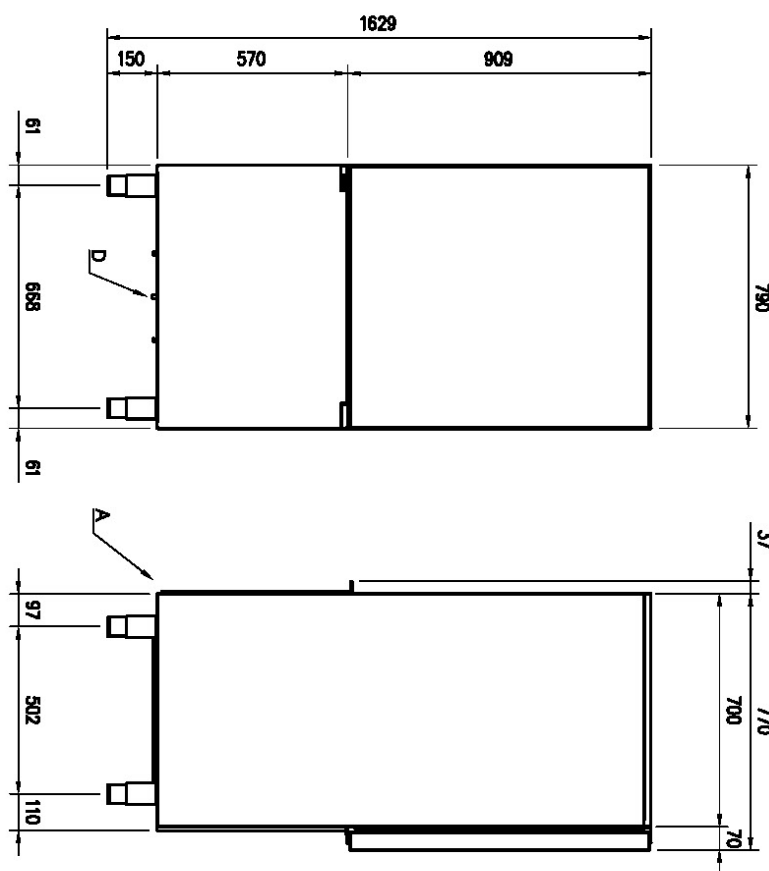

A= ELECTRICAL CONNECTION
D= WATER DISCHARGE ø18 (F)

Technical data sheet



Technical parameters

Blast chiller 10x GN 1/1 with wheels and LED lighting

Model	SAP Code	00038864
SHFN 1011 KL LED	A group of articles - web	Šokery a multifunkční zařízení

1. SAP Code:

00038864

2. Net Width [mm]:

790

3. Net Depth [mm]:

807

4. Net Height [mm]:

1629

5. Net Weight [kg]:

145.00

6. Gross Width [mm]:

830

7. Gross depth [mm]:

860

8. Gross Height [mm]:

1781

9. Gross Weight [kg]:

166.00

10. Device type:

Electric unit

11. Exterior color of the device:

Stainless steel

12. Opening of device:

Hinges on the left

13. Power electric [kW]:

1.310

14. Loading:

230 V / 1N - 50 Hz

15. Control type:

Digital

16. Refrigerant:

R290

17. Number of GN / EN:

10

18. GN / EN size in device:

GN 1/1, EN 600x400

19. GN device depth:

40

20. Minimum device temperature [°C]:

-40

21. Maximum device temperature [°C]:

3

22. Shock freeze cycle kg / min (-18 ° C):

22

23. Shock cooling cycle kg / min (+3 ° C):

32

24. Insulation thickness [mm]:

60

25. Probe:

4-points

26. Adjustable feet:

Yes

27. Cross-section of conductors CU [mm²]:

0,5