Technical data sheet

Product features

Freezing cabinet 113 l, stainless steel		
Model	**SAP Code**	00039835
DNF 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

- Chamber volume [l]: 113
- Minimum device temperature [°C]: -10
- Maximum device temperature [°C]: -22
- Insulation thickness [mm]: 70
- Control type: Digital
- Interior lighting: No
- Door lock: Yes
- Opening of device: Two-sided
- Automatic defrost: Yes
- Annual energy consumption [kWh]: 282

SAP Code	00039835	**Gross Volume [m3]**	0.407
Net Width [mm]	595	**Net Volume [m3]**	0.321
Net Depth [mm]	650	**Minimum device temperature [°C]**	-10
Net Height [mm]	830	**Maximum device temperature [°C]**	-22
Net Weight [kg]	35.00	**Refrigerant**	R600a
Power electric [kW]	0.080	**Noise of device**	49,5-51,1
Loading	230 V / 1N - 50 Hz	**Refrigerant weight [g]**	51.00
Energy class	A++	**Climate class**	4
Chamber volume [l]	113		

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com

Technical data sheet

Technical drawing

Freezing cabinet 113 l, stainless steel		
Model	**SAP Code**	00039835
DNF 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

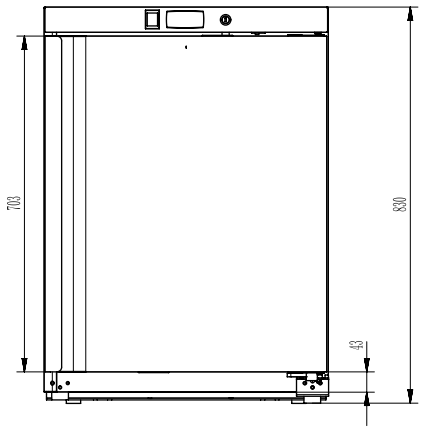

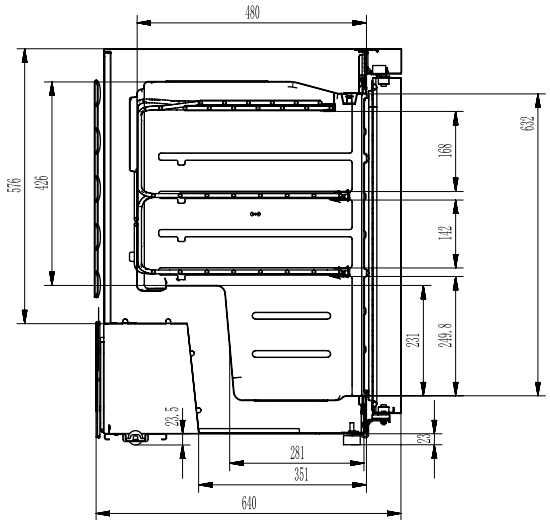

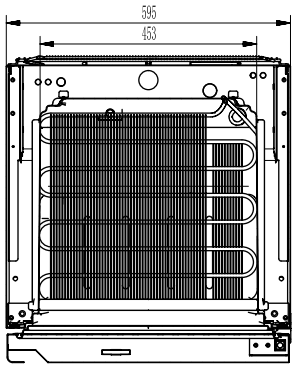

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com

Technical data sheet

Product benefits

Freezing cabinet 113 l, stainless steel		
Model	**SAP Code**	00039835
DNF 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

1 **Energy class A++ – annual energy consumption 282 kWh**

Very energy-efficient operation

- Reduced energy costs

2 **Insulation 70 mm**

Thick PU insulation, lower heat loss

- Lower energy consumption and stable internal temperature even at higher ambient temperatures (up to 38 °C)

3 **Automatic defrost**

Minimal staff intervention required

- Saves staff time and ensures more reliable operation

4 **Pressed drawers**

GN containers can be inserted without using shelves

- Space saving, better ergonomics

5 **All-stainless design of parts that are in the contract with foodstuffs**

used stainless steel intended for contact with food
good maintenance
zero contamination
resists even weaker acids

- long service life and high durability

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com

Technical data sheet

Technical parameters

Freezing cabinet 113 l, stainless steel		
Model	**SAP Code**	00039835
DNF 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

1. **SAP Code:**
   00039835
2. **Net Width [mm]:**
   595
3. **Net Depth [mm]:**
   650
4. **Net Height [mm]:**
   830
5. **Net Weight [kg]:**
   35.00
6. **Gross Width [mm]:**
   630
7. **Gross depth [mm]:**
   680
8. **Gross Height [mm]:**
   950
9. **Gross Weight [kg]:**
   41.00
10. **Device type:**
    Electric unit
11. **Power electric [kW]:**
    0.080
12. **Loading:**
    230 V / 1N - 50 Hz
13. **Energy class:**
    A++
14. **Refrigerant:**
    R600a
15. **Cooling type:**
    Static
16. **Material:**
    Stainless steel
17. **Min ambient temperature [°C]:**
    0
18. **Max ambient temperature [°C]:**
    38
19. **Device properties 2:**
    Freezing
20. **Chamber volume [l]:**
    113
21. **Gross Volume [m3]:**
    0.407
22. **Net Volume [m3]:**
    0.321
23. **Worktop material:**
    SS201
24. **Adjustable feet:**
    Yes
25. **Insulation thickness [mm]:**
    70
26. **Opening of device:**
    Two-sided
27. **Gasket:**
    Yes
28. **Number of doors:**
    1

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com

Technical data sheet

Technical parameters

Freezing cabinet 113 l, stainless steel		
Model	**SAP Code**	00039835
DNF 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

29. Unit:
Yes

30. Control type:
Digital

31. Door lock:
Yes

32. Interior lighting:
No

33. Annual energy consumption [kWh]:
282

34. Minimum device temperature [°C]:
-10

35. Maximum device temperature [°C]:
-22

36. Automatic defrost:
Yes

37. Defrosting cycle:
No

38. Noise of device:
49,5-51,1

39. Refrigerant weight [g]:
51.00

40. Number of grids:
2

41. Climate class:
4

42. Cross-section of conductors CU [mm²]:
0,5

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com