

Technical data sheet



Product features

Manual water softener double tap 12 l

Model	SAP Code	00002198
LT 12	A group of articles - web	Water softeners



- Resin capacity: 8.40
- Inlet pressure [bar]: 2-8
- Material: Stainless steel

SAP Code	00002198	Net Height [mm]	515
Net Width [mm]	190	Net Weight [kg]	12.00
Net Depth [mm]	255	Resin capacity	8.40


Technical data sheet



Technical drawing

Manual water softener double tap 12 l

Model	SAP Code	00002198
LT 12	A group of articles - web	Water softeners

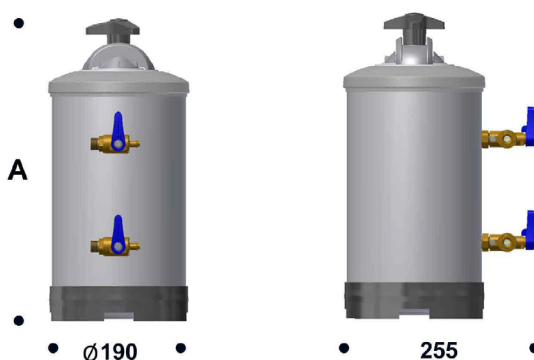

TECHNICAL DATA

Height A mm 500
 Weight Kg 9,5
 Supply water pressure min 1 bar, max 8 bar
 Maximum flow rate recommended 1000 l/h
 Room temperature min 4°C - max 25°C
 Salt content per regeneration 1,5 kg

SUPPLY WATER CHARACTERISTICS

- Drinking water
- Temperature: min 4°C - max 25°C
- Crystal-clear water (SDI 1)
- Maximum hardness 90°f

THE PACKAGING CONTAINS:

- 1 steel AISI 304 cylinder holding 12 litres
- 8.5 litres of cationic resins adapt for softening
- 1 instruction manual
- 1 unloading pipe

LITRES OF SOFTENED WATER ACCORDING TO ITS HARDNESS						
°f	20	30	40	50	60	CYCLIC CAPACITY [m ³ .°f]
°d	11	16	22	28	33	
ppm CaCO ₃	200	300	400	500	600	
	2520	1680	1260	1008	840	50.4

THE WATER SOFTENER IS SUITED FOR:



Technical data sheet



Product benefits

Manual water softener double tap 12 l

Model	SAP Code	00002198
LT 12	A group of articles - web	Water softeners

1

All-stainless design

only stainless steel intended for food contact is used

2

Regeneration of the softener is done only with salt

light regeneration with salt

Technical data sheet



Technical parameters

Manual water softener double tap 12 l

Model	SAP Code	00002198
LT 12	A group of articles - web	Water softeners

1. SAP Code:

00002198

2. Net Width [mm]:

190

3. Net Depth [mm]:

255

4. Net Height [mm]:

515

5. Net Weight [kg]:

12.00

6. Gross Width [mm]:

200

7. Gross depth [mm]:

200

8. Gross Height [mm]:

550

9. Gross Weight [kg]:

13.00

10. Device type:

Neutral unit

11. Material:

Stainless steel

12. Inlet pressure [bar]:

2-8

13. Resin capacity:

8.40