

Technical data sheet

Product features



Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V

Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher



- Display type: 3 local display + diode bar
- Number of programs: 6
- Number of skin: 1
- Door clear height [mm]: 450
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 2,1
- Washing cycle time [s/basket]: 60-120-150
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00011316	Boiler power [kW]	8.000
Net Width [mm]	634	Basin volume [l]	15
Net Depth [mm]	744	Tank power [kW]	2.100
Net Height [mm]	1530	Water consumption of the washing cycle [l/basket]	2,1
Net Weight [kg]	111.00	Washing cycle time [s/basket]	60-120-150
Power electric [kW]	8.500	Door clear height [mm]	450
Loading	400 V / 3N - 50 Hz	Rack size [mm]	500 x 500
Boiler capacity [l]	6.00	Noise of device	60,4


Technical data sheet

Technical drawing



Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V

Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher

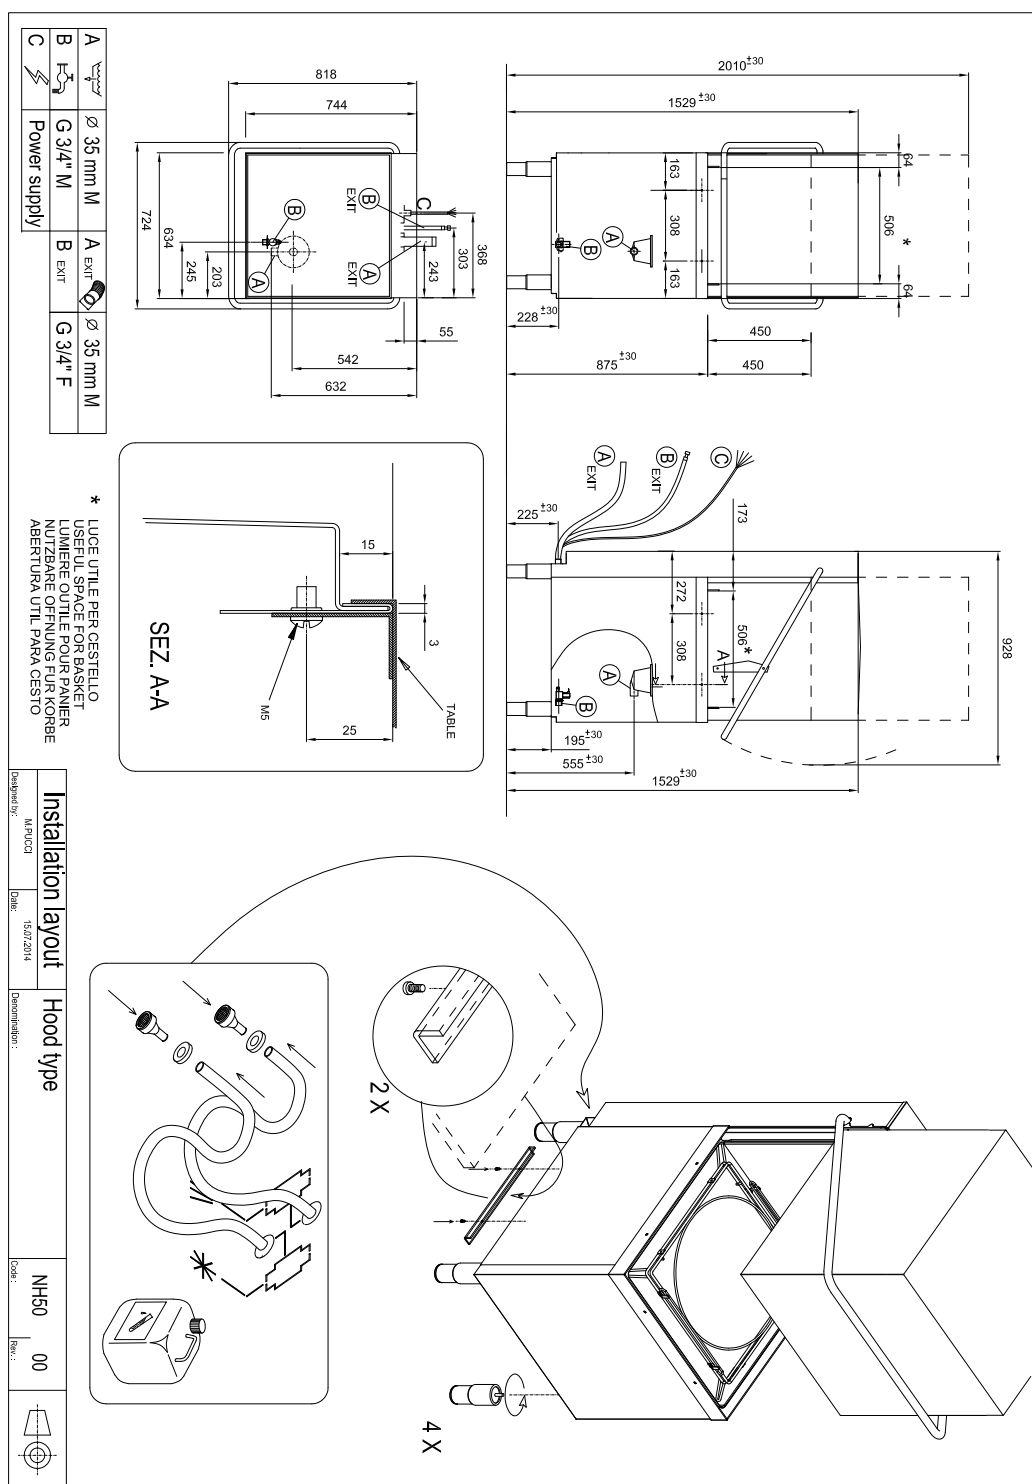

Technical data sheet



Product benefits

Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V

Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher

1

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

2

Washing arms with a component, common for washing and rinsing

washing arms made of composite material
common arm for washing and rinsing
integrated screw secured against falling out

3

LED Display

three-line display
diode strip

4

Double pump

unique two-way DuoFlow pump

5

Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

6

Detergent dispensers

two detergent and rinse aid dispensers

7

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

8

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

Technical data sheet

Technical parameters



Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V

Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher

1. SAP Code:

00011316

2. Net Width [mm]:

634

3. Net Depth [mm]:

744

4. Net Height [mm]:

1530

5. Net Weight [kg]:

111.00

6. Gross Width [mm]:

774

7. Gross depth [mm]:

868

8. Gross Height [mm]:

1579

9. Gross Weight [kg]:

121.00

10. Device type:

Electric unit

11. Control type:

Digital

12. Material:

AISI 304

13. Power electric [kW]:

8.500

14. Loading:

400 V / 3N - 50 Hz

15. Number of programs:

6

16. Opening of device:

Flip up

17. Door clear height [mm]:

450

18. Inlet pressure [bar]:

2-4

19. Adjustable feet:

Yes

20. Number of skin:

1

21. Self-cleaning cycle:

Yes

22. Boiler capacity [l]:

6.00

23. Boiler power [kW]:

8.000

24. Basin volume [l]:

15

25. Tank power [kW]:

2.100

26. Number of arms for both rinsing and washing:

2

27. Arm connection:

Hand loosen/tighten screw

28. Washing arm type:

Rotatable two-pronged

Technical data sheet

Technical parameters



Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V

Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher

29. Washing arm material:

Composite

30. Rinsing arm type:

Rotating two-pronged

31. Rinsing arm material:

Composite

32. Deep drawn tank:

Yes

33. Tank surface strainers:

composite

34. Drain filter:

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

35. Thermostop:

Yes

36. Boiler thermostat adjust:

Yes

37. Rack feed capacity:

24-30-60

38. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

39. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

40. Hot water electric valve:

Yes

41. Rack size [mm]:

500 x 500

42. Display type:

3 local display + diode bar

43. Location of control panel:

On the top

44. USB port:

Yes, for Firmware actualisation

45. Drain pump:

Yes

46. Self-diagnostics:

Yes

47. Wash pump type:

two-way - DuoFlow

48. Detergent dispenser:

Yes

49. Rinse aid dispenser:

Yes

50. Water consumption of the washing cycle [l/basket]:

2,1

51. Washing cycle time [s/basket]:

60-120-150

52. Rinse water temperature [°C]:

80

53. Standard equipment for device:

1x glass basket, 1x plate basket, 1x cutlery basket

54. Program ProSpeed:

Yes

Technical data sheet

Technical parameters



Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V

Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher

55. Program ProFessional:

Yes

56. Program ProTemp:

Yes

57. Program ProClean:

Yes

58. Program ProDrain:

Yes

59. Program ProLong:

Yes

60. Noise of device:

60,4

61. Cross-section of conductors CU [mm²]:

1,5

62. Water supply connection:

3/4"

63. Diameter nominal:

DN 50