

Product features

Undercounter dishwasher single skin with drain pump 50x50 - 230 V		
Model	SAP Code	00011281
QQI 52 P	A group of articles - web	Undercounter, continuous and black ware dishwasher




- Display type: 3 local display + diode bar
- Number of programs: 6
- Number of skin: 1
- Door clear height [mm]: 365
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 2,1
- Washing cycle time [s/basket]: 60-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste


SAP Code	00011281	Boiler power [kW]	3.000
Net Width [mm]	575	Basin volume [l]	20
Net Depth [mm]	605	Tank power [kW]	2.100
Net Height [mm]	820	Water consumption of the washing cycle [l/basket]	2,1
Net Weight [kg]	55.00	Washing cycle time [s/basket]	60-120-150
Power electric [kW]	3.500	Door clear height [mm]	365
Loading	230 V / 1N - 50 Hz	Rack size [mm]	500 x 500
Boiler capacity [l]	6.00	Noise of device	59,5



Technical drawing

Undercounter dishwasher single skin with drain pump 50x50 - 230 V		
Model	SAP Code	00011281
QQI 52 P	A group of articles - web	Undercounter, continuous and black ware dishwasher



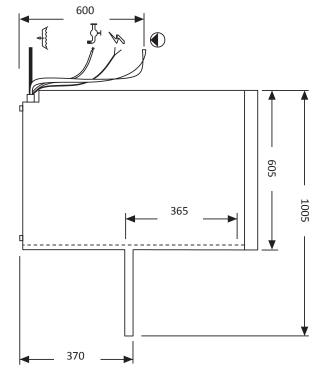



Product benefits

Undercounter dishwasher single skin with drain pump 50x50 - 230 V		
Model	SAP Code	00011281
QQI 52 P	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

Washing arms with a component, common for washing and rinsing

washing arms made of composite material common arm for washing and rinsing integrated screw secured against falling out

3 LED Display three-line display diode strip

Double pump
unique two-way DuoFlow pump

Molded basket supports
guide rails for the baskets molded from the body of the dishwasher

6 Detergent dispensers
two detergent and rinse aid dispensers

7 Double filter system
the chamber filter and the waste filter together with the
ArchiMedes system provide a discharge system with
increased water purification efficiency

Energy saving energy saving system due to lowering the temperature of the boiler



Technical parameters

Undercounter dishwasher single	skin with drain pum	p 50x50 - 230 V
Model	SAP Code	00011281
QQI 52 P	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011281		15. Number of programs: 6
2. Net Width [mm]: 575		16. Opening of device: Tilting down
3. Net Depth [mm]: 605		17. Door clear height [mm]: 365
4. Net Height [mm]: 820		18. Inlet pressure [bar]: 2-4
5. Net Weight [kg]: 55.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 625		20. Number of skin:
7. Gross depth [mm]: 655		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 870		22. Boiler capacity [l]: 6.00
9. Gross Weight [kg]: 61.00		23. Boiler power [kW]: 3.000
10. Device type: Electric unit		24. Basin volume [l]:
11. Control type: Digital		25. Tank power [kW]: 2.100
12. Material: AISI 304		26. Arm connection: Hand loosen/tighten screw
13. Power electric [kW]: 3.500		27. Washing arm type: Rotatable two-pronged
14. Loading:		28. Washing arm material:

230 V / 1N - 50 Hz

Composite



Technical parameters

Undercounter dishwasher sing	gle skin with drain pump 5	0x50 - 230 V
Model	SAP Code	00011281
QQI 52 P	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Rinsing arm type: Rotating two-pronged		42. Drain pump: Yes
30. Rinsing arm material: Composite		43. Self-diagnostics: Yes
31. Rack support: Pressed		44. Wash pump type: two-way - DuoFlow
32. Tank surface strainers: composite		45. Detergent dispenser: Yes
33. Drain filter: ArchiMedes - double filtration we ensures only 18% loss of clean		46. Rinse aid dispenser: Yes
34. Thermostop: Yes		47. Water consumption of the washing cycle [l/basket]: 2,1
35. Boiler thermostat adjust: Yes		48. Washing cycle time [s/basket]: 60-120-150
36. Rack feed capacity: 24-30-60		49. Rinse water temperature [°C]: 80
37. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump		50. Standard equipment for device: 1x glass basket, 1x plate basket, 1x cutlery basket
38. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature		51. Program ProSpeed: Yes
39. Rack size [mm]: 500 × 500		52. Program ProFessional: Yes
40. Display type: 3 local display + diode bar		53. Program ProTemp: Yes
41. USB port:		54. Program ProClean:

Yes

Yes, for Firmware actualisation



Technical parameters

Undercounter dishwasher sin	gle skin with drain pump 50	x50 - 230 V
Model	SAP Code	00011281
QQI 52 P	A group of articles - web	Undercounter, continuous and black ware dishwasher
55. Program ProDrain: Yes		58. Cross-section of conductors CU [mm²]:
56. Program ProLong: Yes		59. Water supply connection: 3/4"
57. Noise of device:		60. Diameter nominal: